

SharpDrain® | Polished Concrete

SDPC.0500

A drain designed for polished concrete without a flange allowing for continuous concrete depth for greater strength. Concrete can be poured into the insert at 25mm thickness. Supplied with installation feet and a low profile outlet which can be rotated for easy installation.



Specification

MATERIAL

Stainless Steel and Plastic

CAPACITY

48 l/min

OUTLET

Rotating Outlet

USAGE

Linear Drain

FLOORING

Polished Concrete




REMOVABLE TRAP FOR CLEANING

Yes

SharpDrain® | Polished Concrete

SDPC.0500

Plan View

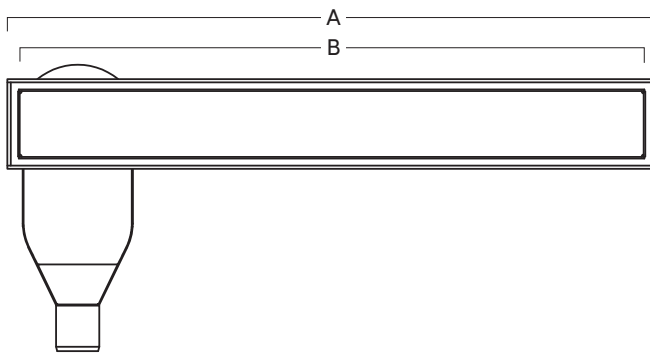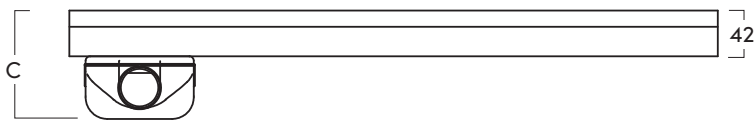

STRUCTURAL LENGTH - A

500mm

VISUAL LENGTH - B

480mm

DRAIN DEPTH - C

100mm