

**IDEAL FOR  
PREFAB PODS**

**EN 1253  
approved**

Installation height  
from  
**81 mm**



**wm**  
wetroom materials

LINEAR DRAINS FOR PREFABRICATED BATHROOM PODS

 **unidrain<sup>®</sup>**

- > MANY YEARS  
OF EXPERIENCE IN  
THE PREFAB MARKET
- > GREAT FLEXIBILITY
- > FAST DELIVERY
- > HIGH CAPACITY
- > BEST QUALITY
- > SCANDINAVIAN DESIGN  
AT ITS BEST

# SELECTED REFERENCES

## RESIDENTIAL

- **Project:** Norra Tornen And Helix Towers  
Stockolm, Sweden  
**Quantity:** 380 units
- **Project:** Canary Warf, Wood Warf A1-2-3  
London, UK  
**Quantity:** 1425 units
- One Crown Place  
London, UK  
**Quantity:** 291 units
- 1 Bishops Gate Plaza  
London, UK  
**Quantity:** 200 units

## HOTELS

- Mayfair Park Residence  
London, UK  
**Quantity:** 50 units
- **Project:** 5 Stars Hotel  
Kingdom of Eswatini  
**Quantity:** 300 units
- **Project:** Hotel Britannia  
Trondheim, Norway  
**Quantity:** 168 units
- Hotel Post  
Göteborg, Sweden  
**Quantity:** 40 units

# SAFE CONSTRUCTION

The smart Unidrain invention is made out of one single piece of metal, making it safe and easy to apply all types of wet room membranes. The unique patented flanges further improve the wet room security, leaving no room for leaks in the transition between the drain, the wall and the floor. The safe construction, easy installation and the variety of design choices will be an advantage for any manufacturer of prefabricated pods.

## 4 PARTS



Unidrain's unique structure is patented in Europe (no. 1287213) and patents have been applied for in a number of countries all over the world. Unidrain® is a registered trademark.



EN 1253



VA 2.42/19872

DIN 4109



VDI 4100



SIA 181







## NEW | 1418.0050

- EXTRA LOW INSTALLATION HEIGHT
- EN1253 APPROVED

1004.0300

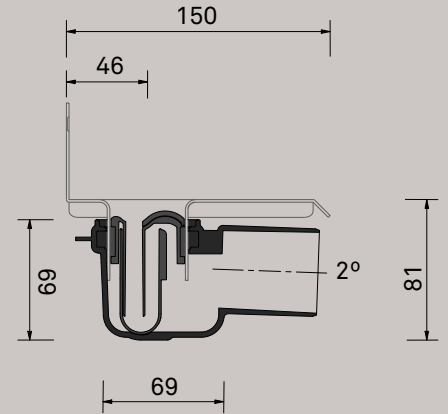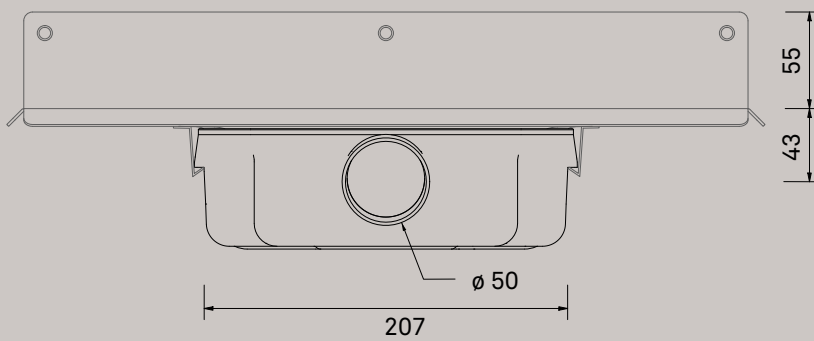

## 1. OUTLET UNIT



1418.0050  
Ø 50 mm  
Capacity 0,6 l/s  
Height 69 mm

1411.0050  
Ø 50 mm  
Capacity 0,91 l/s  
Height 86 mm

1417.0050  
Ø 50 mm  
Capacity 0,6 l/s  
Height 52 mm

1312.0075  
Ø 75 mm  
Capacity 1,7 l/s  
Height 96 mm


1416.0050  
Ø 50 mm  
Capacity 0,8 l/s  
Height 86 mm

1415.0050  
Ø 50 mm  
Capacity 0,8 l/s  
Height 86 mm


## 2. DRAIN UNIT



1004  
Shower niche/bathroom  
with distance to side walls




## 3. FRAME

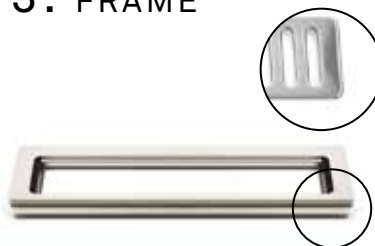

### CLASSICLINE

The height of the frame (8, 10 or 12 mm) depends on the thickness of the floor tile. The frame is mandatory and has a double function: to support the grating and provide a perfect flush finish with the tiled floor.

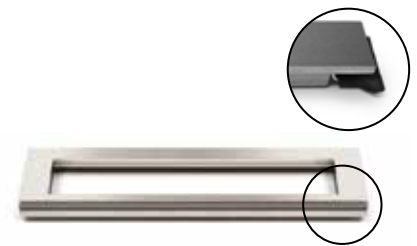

### HIGHLINE

The height of the frame (10, 12, 15 or 25 mm) depends on the thickness of the floor tile. The frame is designed to emphasise the exclusive design of the floor drain. The frame is mandatory (except for the Custom solution).

## 4. GRATINGS & PANELS

### CLASSICLINE GRATING



CLASSIC



COLUMN



INCA



SQUARE



STRIPE



ANNIVERSARIO

### HIGHLINE PANEL



BRUSHED STEEL



BRUSHED BLACK  
PVD-treated surface



BRUSHED BRASS  
PVD-treated surface



BRUSHED COPPER  
PVD-treated surface



HAND-POLISHED STEEL



CUSTOM  
mounted with a floor tile  
as required.



CASSETTE  
with edges on all sides, for use with any  
material. Ideal for e.g. terazzo floors.

## BENEFITS OF THE UNIDRAIN LINEAR DRAIN

- MADE OUT OF ONE SINGLE PIECE OF METAL  
- INCREASED WET ROOM SECURITY
- PATENTED WALL FLANGES REDUCES  
THE RISK OF WET ROOM DAMAGE
- IDEAL FOR UPSIDE DOWN INSTALLATION
- EASY AND FAST INSTALLATION  
- SAVES TIME IN COMPLETION OF PODS
- APPROVALS IN MAJOR MARKETS
- UNIFORM RESULT EVERY TIME  
- INCREASED EFFICIENCY